

INGROUND UPLIGHT 4W

Description

- Designed to be used as an uplighter to highlight trees, walls or posts.
- Suitable for use on decks, walkways and pathways
- Can be installed in both indoor and outdoor environments
- Environmental rating of IP67

Features

- High grade solid 316 stainless steel
- High performance / high reliability LEDs
- Low glare design
- Safe low voltage



Electrical Data

Voltage	24.0 VDC
Wattage	4.0 W
Current	0.166 A

Photometric Data

Colour temperature	See figure 1
Colour rendering index Ra	>80
Luminous flux	350 lm
Luminous efficacy	87.5 lm/W
Beam angle	30°
Dimmable	No

Construction / Protection Data

Housing	Brushed 316 Stainless Steel
Mounting	Recessed
IP Rating	IP67
Impact Rating	IK06
Load Rating	N/A
Operating temperature	-10 ~ +50 C°
Storage temperature	-20 ~ +50 C°



Dimensions

Diameter (Outer)	76 mm
Diameter (Inner)	58 mm
Height (Overall)	49 mm


Lifetime

Lifespan (L70)	>70,000 hours
----------------	---------------

Testing environment temperature = 25°C ±2.0°

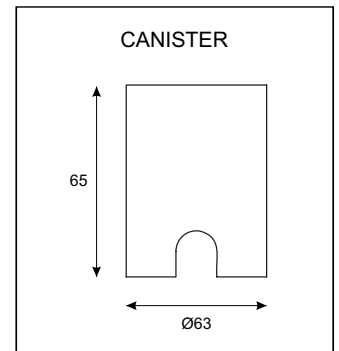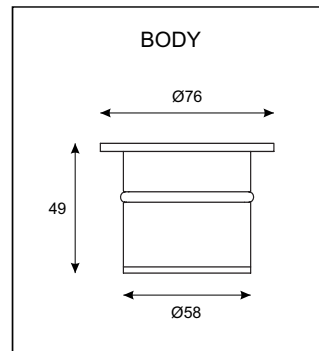

Luminous Intensity Distribution Diagram

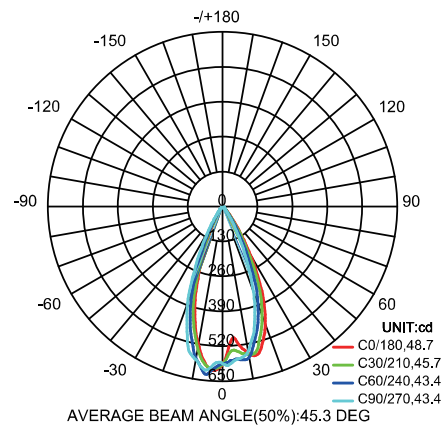

Part Numbering

LL-ON-B1042-3K

Stainless Steel (316)

3000°K

Figure 1.

Colour Temperature



3000°K
Warm White