

Description

- Designed to be used as ground marker indicating lights
- Suitable for use on walkways, pathways and private roadways
- Available in 1, 2 and 4 way beam angles

Features

- High grade 316 stainless steel
- Interchangeable LED module
- High performance / high reliability LEDs
- No glare design
- Safe low voltage
- Surface mounted for ease of installation
- Simple recessed screw fixing



Electrical Data

Voltage	12.0 VDC
Wattage	1.5 W
Current	0.125 A

Photometric Data

Colour temperature	See figure 1
Colour rendering index Ra	>80
Luminous flux	135 lm
Luminous efficacy	90 lm/W
Beam angle	65°
Dimmable	No



Construction / Protection Data

Housing	Brushed 316 Stainless Steel (std)
	Brushed Brass
	Antique Brass
	Solid Copper
	Black / Grey Aluminium
Mounting	Surface
IP Rating	IP67
Impact Rating	IK10
Load Rating	1000 kg
Hardware	4x Allen Key Screws
Operating temperature	-10 ~ +60 C°
Storage temperature	-20 ~ +50 C°

Dimensions

Diameter	86 mm
Height	18 mm

Testing environment temperature = 25°C ±2.0°

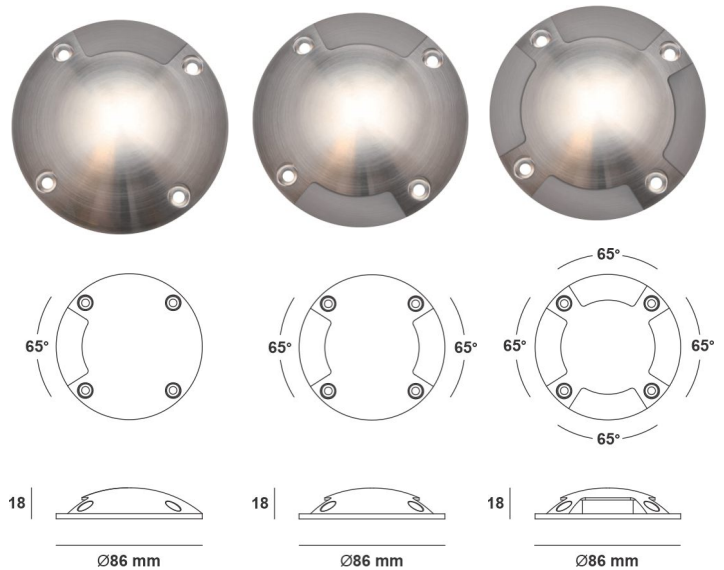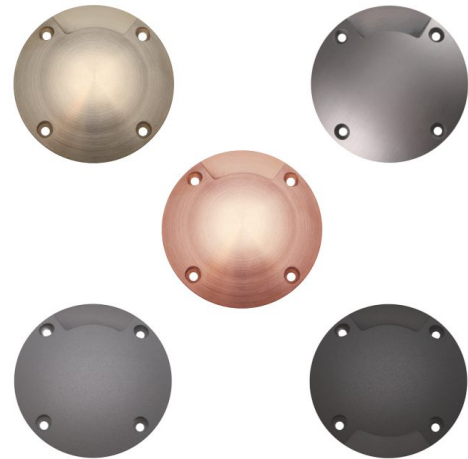

Part Numbering

LL-ON-C1022SS-3K	1 - Way	Stainless Steel (316)	3000°K
LL-ON-C1022SS-4K	1 - Way	Stainless Steel (316)	4000°K
LL-ON-C1023SS-3K	2 - Way	Stainless Steel (316)	3000°K
LL-ON-C1023SS-4K	2 - Way	Stainless Steel (316)	4000°K
LL-ON-C1024SS-3K	4 - Way	Stainless Steel (316)	3000°K
LL-ON-C1024SS-4K	4 - Way	Stainless Steel (316)	4000°K

Figure 1.

Colour Temperatures



3000°K
Warm White



4000°K
Cool White