



IP67

NF-1306TB

LED NEON FLEX LIGHT

13x06

PRODUCT SPECIFICATION

Custom assembled in Australia

LINEAR **LUX**
LED LIGHTING SOLUTIONS


Product Features

- This is a silicone based neon flex, it has excellent resistance to yellowing and cracking
- Silicone can withstand extreme temperatures and environments such as salt water.
- Silicone is resistant to the harsh effects of UV light and chemical exposure.
- Neon flex produces a uniform light output without dots.
- Assembled in Australia to desired specifications.



Silicone vs PVC

| Materials | Silicone Neon Flex | PVC Neon Flex | Notes |
|-------------------------------|----------------------------------|--|--|
| Main Parameters | | | |
| Colloid features @ -40°C | No cracking after 30 days | Totally Cracked | Low temperature resistance of silicone is far superior than PVC or epoxy materials |
| Colloid features @ 120°C | No obvious change after 72 hours | Colloid changed to yellow and deformed after 2 hours | High temperature resistance of silicone is far superior than PVC or epoxy materials |
| Colloid features @ 180°C | No obvious change after 72 hours | Colloid changed to brown and melted after 2 hours | Above 150°C, PVC is easily hydrolysed. Viscosity becomes weak and easily separated |
| Held in seawater for 72 hours | No obvious change | Series atomisation on the surface | Silicone has a high resistance to acidic, alkali and salt substances |
| Thermal conductivity | Good conductivity | Very poor conductivity | The LEDs within the neon flex requires good thermal conductivity to ensure reliability |

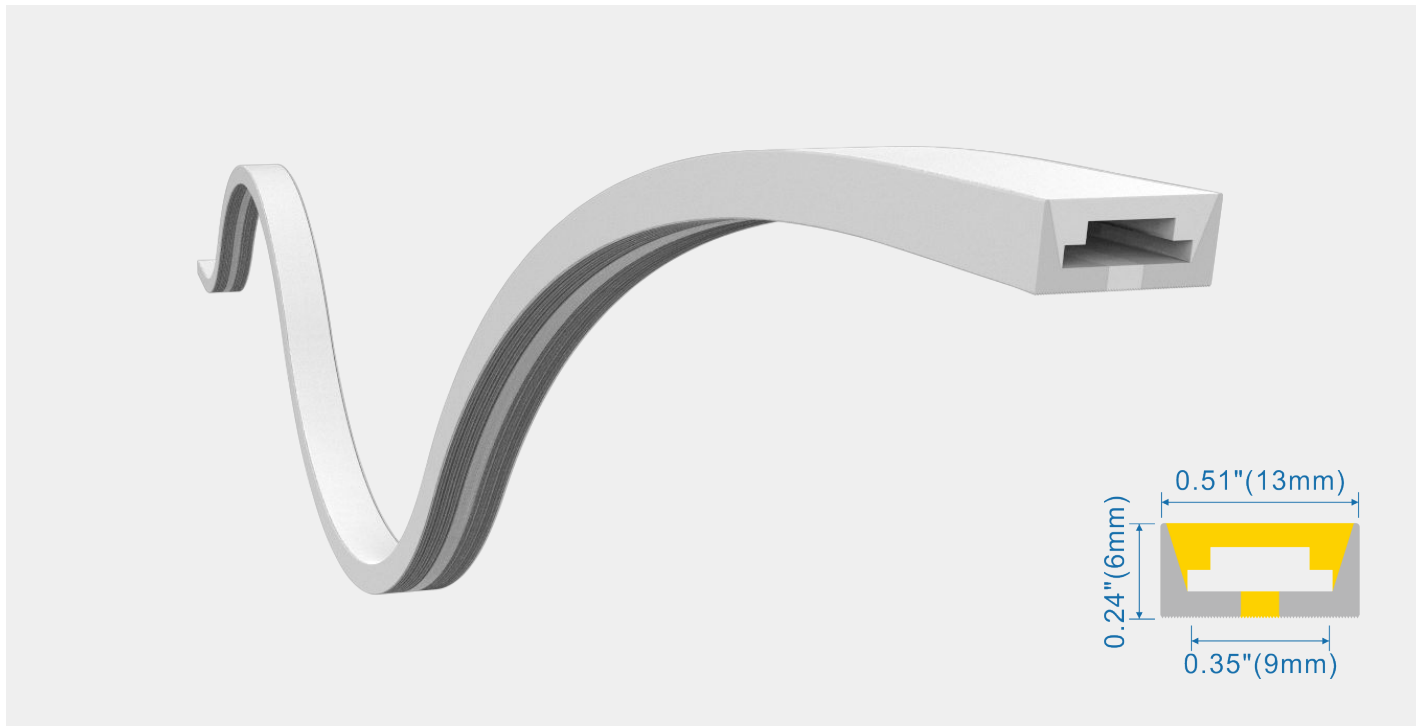Product Image & Dimensions




Specification

| Part Number | Colour | Lumens/m | Cutting Increments | | Voltage | Power/m | Length |
|------------------|--|----------|--------------------|------------|---------|---------|--------|
| NF-1306TB7.2-2K2 | 2200°K  | 445 | 12V / 25mm | 24V / 50mm | 12 / 24 | 7.2W | <12.0m |
| NF-1306TB7.2-2K4 | 2400°K  | 468 | 12V / 25mm | 24V / 50mm | 12 / 24 | 7.2W | <12.0m |
| NF-1306TB7.2-2K7 | 2700°K  | 493 | 12V / 25mm | 24V / 50mm | 12 / 24 | 7.2W | <12.0m |
| NF-1306TB7.2-3K0 | 3000°K  | 519 | 12V / 25mm | 24V / 50mm | 12 / 24 | 7.2W | <12.0m |
| NF-1306TB7.2-4K0 | 4000°K  | 546 | 12V / 25mm | 24V / 50mm | 12 / 24 | 7.2W | <12.0m |
| NF-1306TB7.2-6K0 | 6000°K  | 575 | 12V / 25mm | 24V / 50mm | 12 / 24 | 7.2W | <12.0m |
| NF-1306TB9.6RGB | RGB  | N/A | 12V / 25mm | 24V / 50mm | 12 / 24 | 9.6W | <12.0m |


Please Note:

1. Fixed colours such as blue or orange are available.
2. To avoid voltage drop we do not recommend lengths longer than 5m for 12V and 10m for 24V. If longer lengths are required we suggest powering the light from both ends.
3. Cutting distances may vary slightly.


Assembled Product

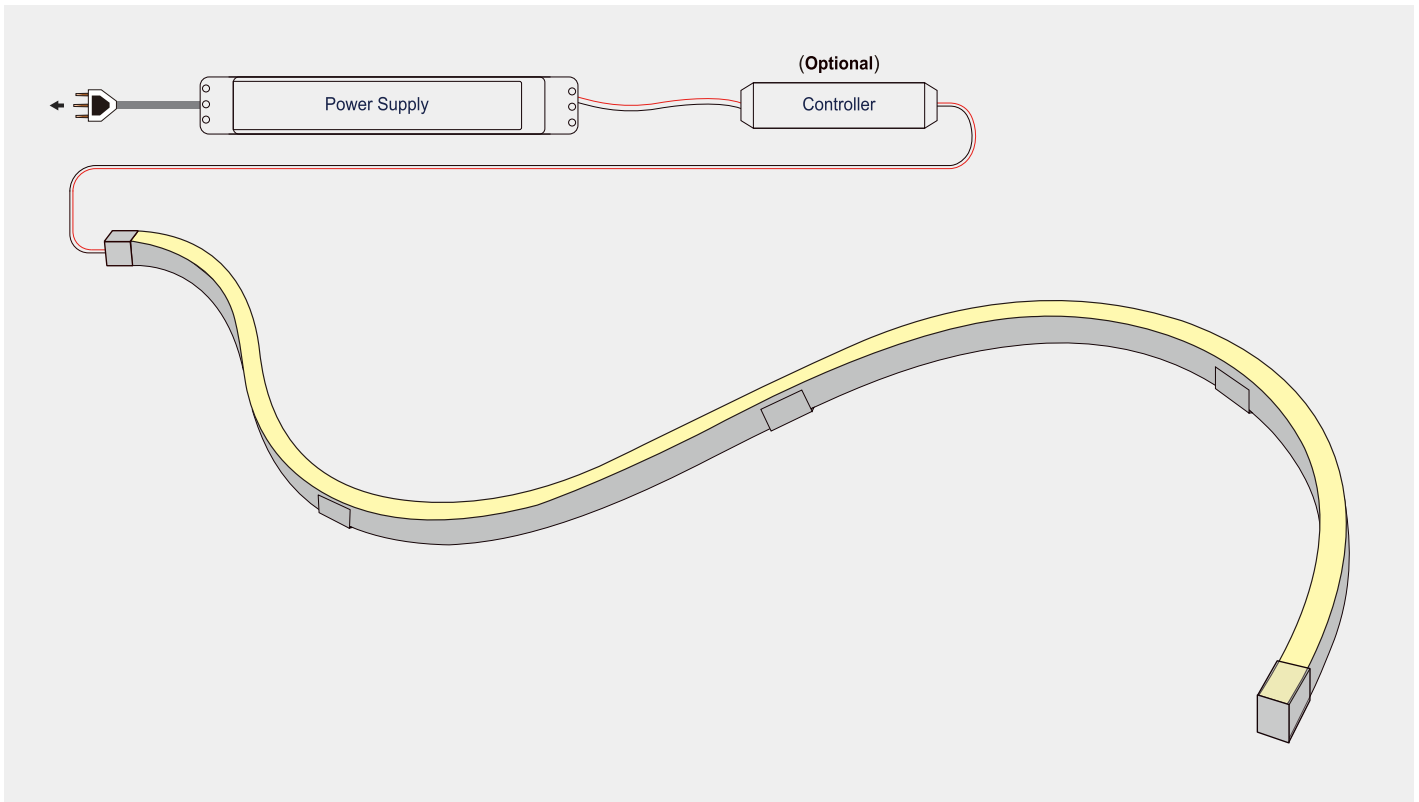

Cable Entry Options

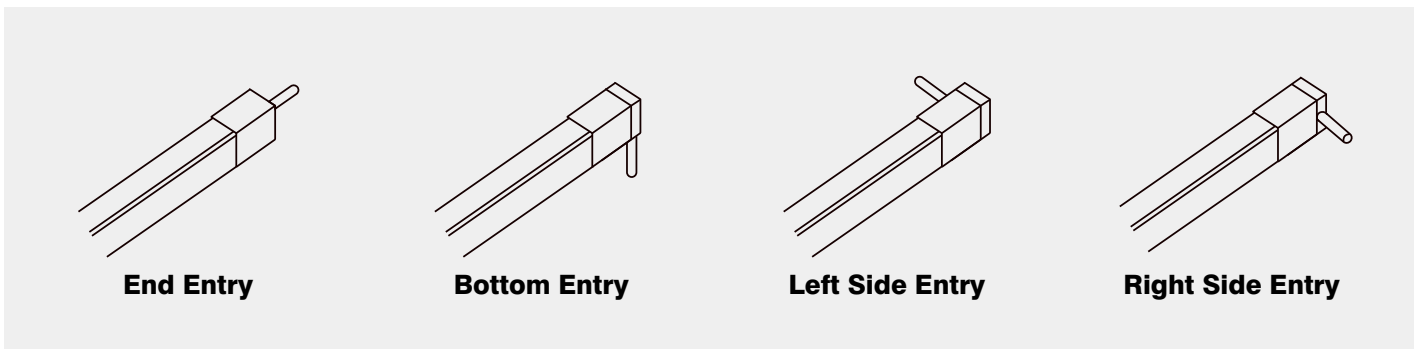


Mounting Options

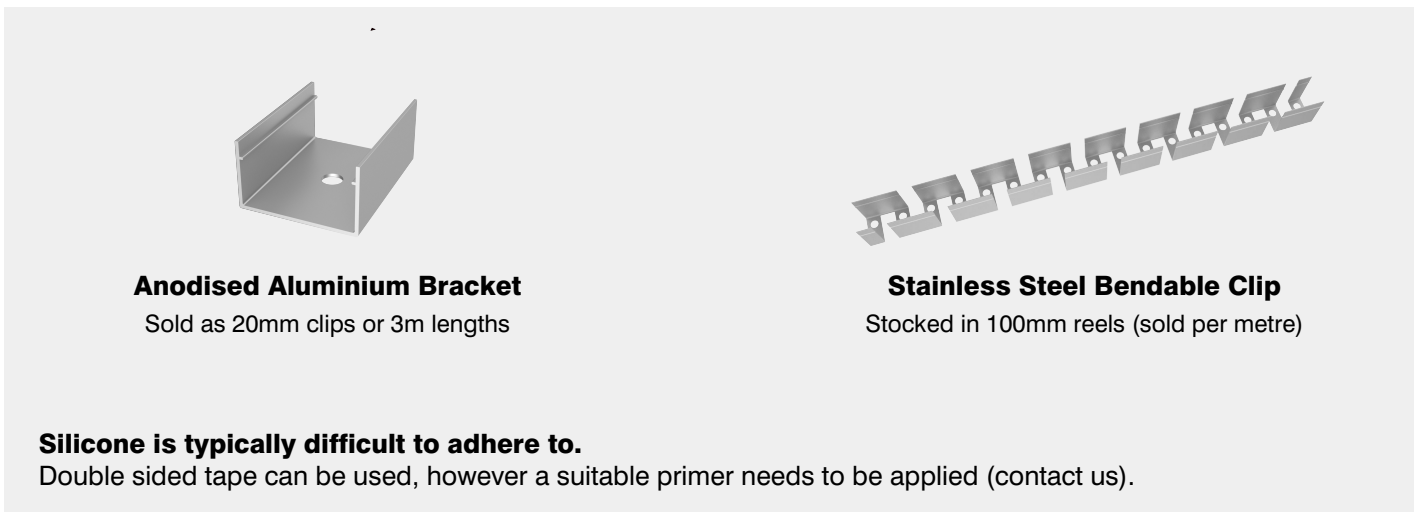


Caution

- Care needs to be taken when transporting and installing the product.
- Lengths greater than 2m requires no fewer than 2 people. The neon flex should always be supported and not left hanging by it's own weight.
- Modifying or shortening the neon flex is strongly discouraged.
- Avoid twisting the neon flex
- Only bend the neon flex in the intended direction i.e. either side bend or top bend.
- Adhere to the minimum bending radius

Correct Bending Direction

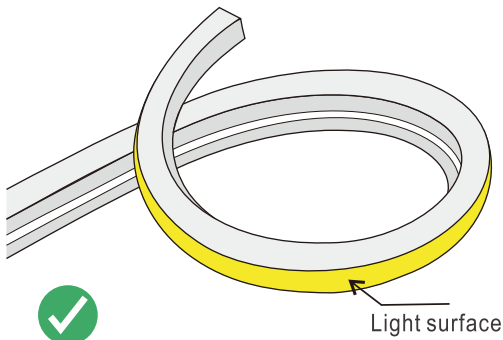


Top or bottom bending direction

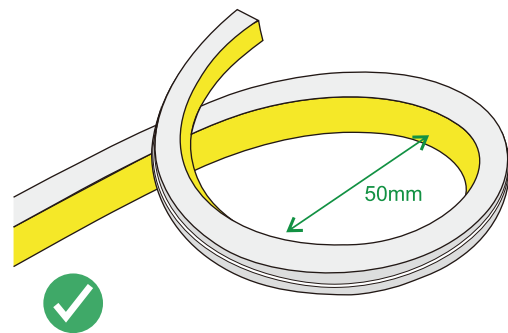

Minimum bending radius is 50mm

Wrong Bending Direction

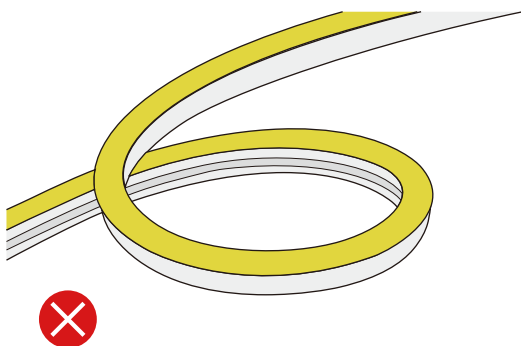

Do not bend sideways,
only top or bottom



Do not twist the neon flex