



Profile Colour	Clear Silver (Anodised) - stocked		
	White (Painted) - stocked		
	Black (Anodised) - stocked		
	Custom Powder Coating - indent*		
End Cap Colour	White - stocked		
	Grey - indent*		
	Black - stocked		
	Silver - stocked		

Light Transmission

Lens (Cover)	Clear (100% light transmission) - stocked	
	Opal (40~30% light transmission) - stocked	
	Diffused (80~70% light transmission) - stocked	
	Black - stocked	



Profile	Aluminium: 6063-T5		
	Anodised Thickness: 10µm		
Cover	Polycarbonate (fire rating: V2) UV Resistant		
End Caps	Polycarbonate (fire rating: V2) UV Resistant		
Pendant Kit	Stainless Steel		

Dimensions

Width (overall)	16.0 mm
Height (overall)	16.0 mm
Max LED tape width	10.0 mm
Length	3.0 m

Accessories


Suspension Kit	None		
End Caps	Blank & cable entry hole		
Mounting Clips	Stainless Steel		

* Indent items are available but may incur minimum order quantities and long









ALUMINIUM FINISH



COVER TYPES




















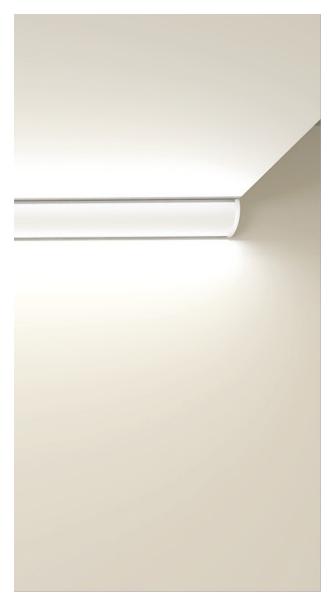





© 2024, Linear Lux linearlux.au Data sheet issued August 2024 Page 2 of 2